

Technical datasheet - S9128



EMOS spol. s r. o.
Tel: +420 581 261 172
Email: emos@emos.eu
Web: www.emos.eu

Logistic information

Type	UTP CAT5E CCA PVC
Order Nr.	23 09 010 080
Comm. Nr.	*S9128
EAN pc	8592920000021
EAN export carton	8592920000038

Product description

- 100 Base-T4
- 100 Base-TX

Meets standards requirements


ISO/IEC 11801

Cable construction

Twisted pair	4 x
Number of wires	4 x 2
Inner conductor	Copper clad aluminium
AWG	24
Wire Diameter (mm)	0,51
Insulation of conductors	HDPE
Average Thickness (mm)	0,22
Tension element	Nylon 150D

Cable jacket	PVC
Thickness (mm)	1,1
Diameter (mm)	5,20
Color	grey

Color coding of wires

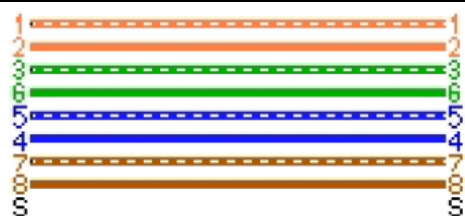

Marking

UTP Cat5E PVC	1 - 305 m
---------------	-----------

Packing

305 m/ paper box
Material: 5 layer cardboard, painted with printing


Mechanical properties

Max. DC resistance at 20 ° C	94,8 Ω/Km
Operating temperature	60 °C
Shortening factor	65%


<http://www.emos.eu>

e-mail: info@emos.cz

Cable structure

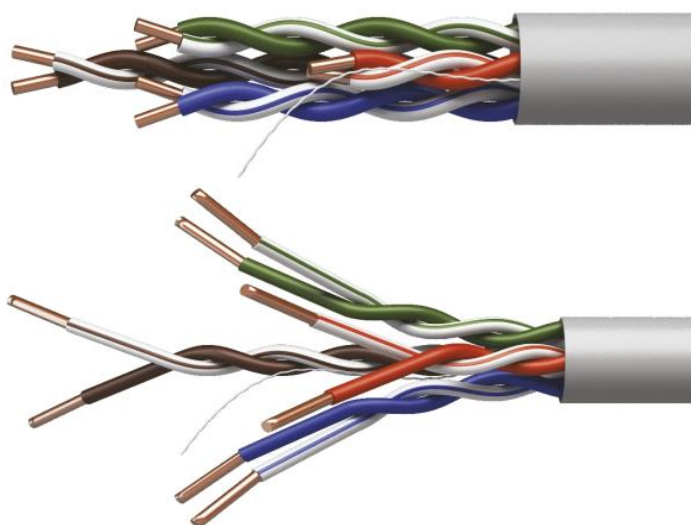

Cable crosscut

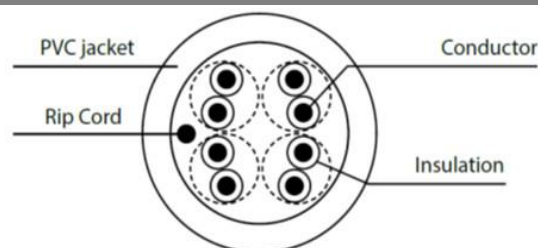

Package preview

