

SEO motor operator 24-60V AC/DC accessory for: 3VA2
100/160/250



Model	
Product brand name	SETRON
Product designation	Accessories
Product version	Motorized operating mechanism with stored energy mechanism (SEO)
Voltage	
Control voltage type	DC
Rated operational power	300 V·A
Mechanical Design	
Rated control supply voltage Us with DC	24 V
Height	118.7 mm
Width	104.6 mm
Depth	162.8 mm
Connectable conductor cross-section / solid	
• minimum	1.5 mm²
• maximum	1.5 mm²
Connectable conductor cross-section / finely stranded / with core end processing	

• minimum	1.5 mm ²
• maximum	1.5 mm ²
Connectable conductor cross-section / stranded	
• minimum	1.5 mm ²
• maximum	1.5 mm ²
Ambient temperature / during operation	
• minimum	-25 °C
• maximum	70 °C
Ambient temperature / during storage	
	-40 ... +80
Tightening torque	
• minimum	0.18 N·m
• maximum	0.22 N·m

Connections according IEC

Wire stripping length	6 mm
-----------------------	------

Certificates

General Product Approval	EMC	Declaration of Conformity	Shipping Approval	other
Miscellaneous				
	RCM	EG-Konf.	LRS	Manufacturer Declaration

other

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9267-0HC10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9267-0HC10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9267-0HC10

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

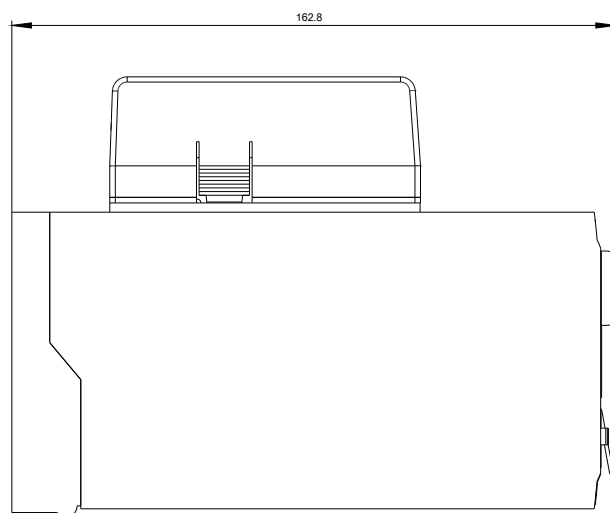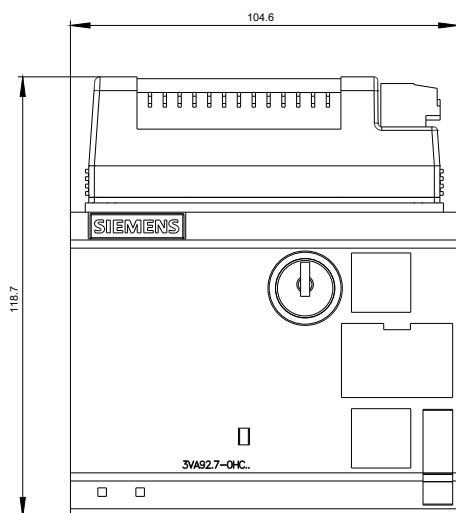

last modified:

05/06/2020