

DATOVÝ LIST - NZM2-XAD250



Adaptér na sběrnice, 3p, pro NZM2, 250A, UL508

**Typ
Catalog No.**

**NZM2-XAD250
104555**



Dodavatelský program

Sortiment			60mm systém Kompaktní systém
Základní funkce			Sběrnice adaptér pro NZM
Dílčí sortiment			Adaptéry pro výkonové jističe a vypínače
Funkce			Pro montáž na ploché sběrnice Cu 12-30 x 5-10, na dvojité a trojitý T-profil
jmenovité provozní napětí	U _e	V AC	690
Odolný proti teplotám			do 120°C
Samozhášecí			podle UL 94
Odolnost proti plazivým proudům			CTI 200
Počet pólů			3 pole
Jmenovitý proud	I _e	A	250
Šířka adaptéru		mm	106
Použitelný pro			NZM2, PN2, N(S)2
Cu factor		kg	0,32

Poznámky

Connection to the system possible at top or bottom via connection on rear (+)NZM2-XKR4...

Mounting using clamp and screw fixing.


Rated short-circuit switching capacity 65 kA at 480 V, 50 kA at 600 V.

Mounted by latching onto de-energized busbar.

aprobace,

Product Standards			UL508A; CSA-C22.2 No. 14; IEC 60439-1; CE marking
UL File No.			E300273
UL Category Control No.			NMTR, NMTR7
CSA File No.			236217
CSA Class No.			3211-37
North America Certification			UL listed, CSA certified
Conditions of Acceptability			Refer to approbation report
Specially designed for North America			No
Suitable for			Feeder circuits
Current Limiting Circuit-Breaker			Refer to approbation report
Max. Voltage Rating			600 V AC
Degree of Protection			Feeder circuits

Rozměry

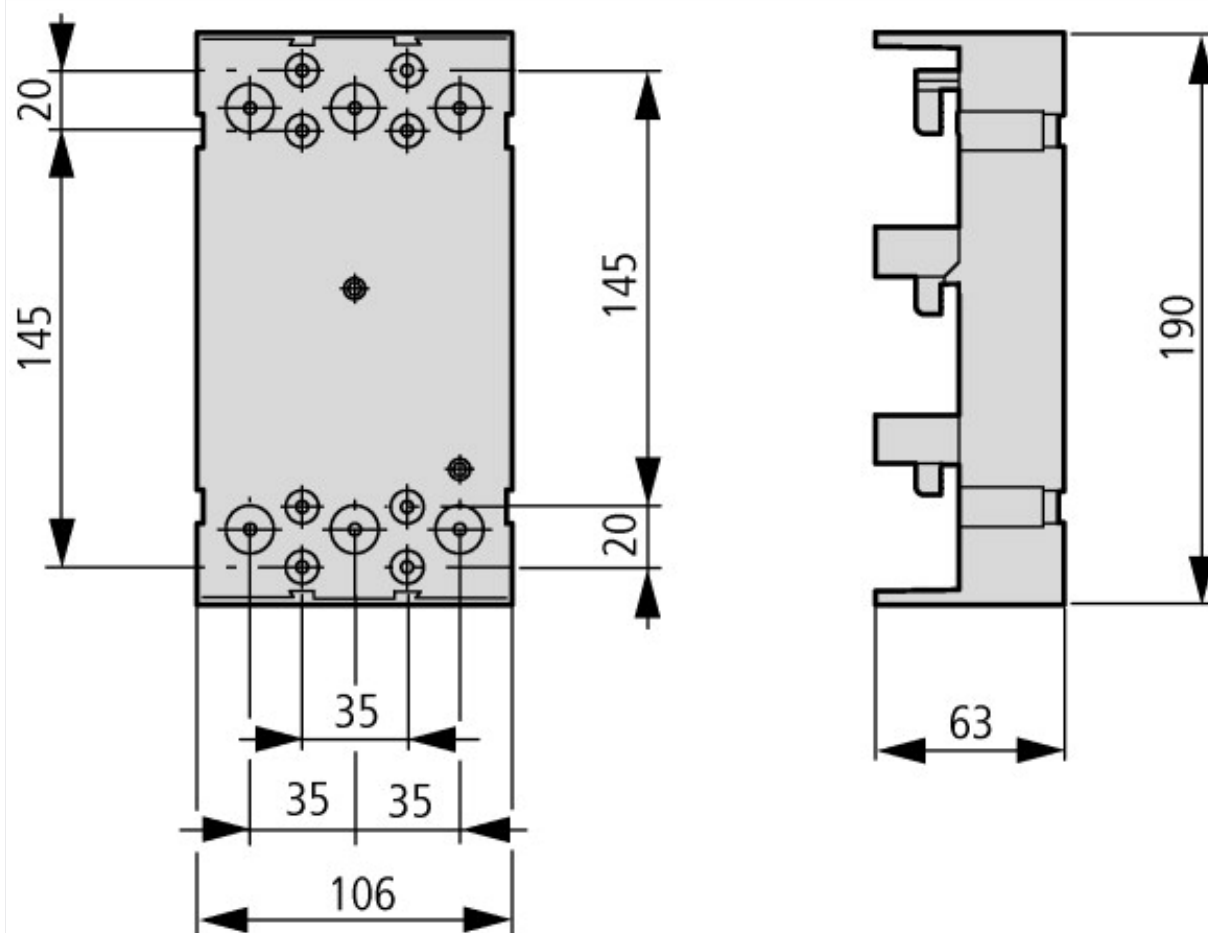

Další informace o produktech (propojení)

IL01502145Z Component adapter for circuit-breakers and switch-disconnectors

IL01502145Z Component adapter for circuit-breakers and switch-disconnectors

https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL01502145Z2016_09.pdf