


Data Sheet | Item Number: 706-150/340-200
Connection cable; 40-pole; Pluggable connector per DIN 41651; 40-pole; Pluggable connector per DIN 41651; Length: 2 m; Conductor cross-section: 0.14 mm²



<https://www.wago.com/706-150/340-200>

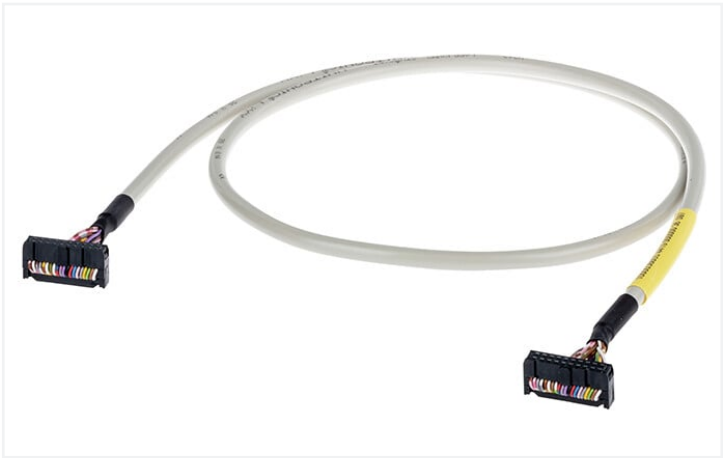

Similar to illustration

Color coding acc. to DIN VDE 47100	40-pole connector Pin number
White	1
Brown	2
Green	3
Yellow	4
Grey	5
Pink	6
Blue	7
Red	8
Black	9
White	10
Grey-Pink	11
Red-Blue	12
White-Green	13
Brown-Green	14
White-Yellow	15
Yellow-Green	16
White-Grey	17
Grey-Black	18
White-Black	19
Pink-Brown	20
White-Blue	21
Brown-Blue	22
White-Red	23
Brown-Red	24
White-Black	25
Brown-Black	26
Grey-Green	27
Yellow-Grey	28
Pink-Green	29
Yellow-Pink	30
Green-Blue	31
Yellow-Blue	32
Green-Red	33
Yellow-Red	34
Green-Black	35
Yellow-Black	36
Grey-Blue	37
Pink-Blue	38
Grey-Red	39
Pink-Red	40

Notes	
Note	When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Electrical data	
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	1 A

Connection data	
Cable type	LiYY
Color code	per DIN VDE 47100
Connection 1	
Connector	Pluggable connector per DIN 41651; female connector
Pole number 1	40
Connection type 1	System
Wire cross-section	0.14 mm²
Connection type	Pluggable Connector per DIN 41651

Connection 2	
Connector 2	Pluggable connector per DIN 41651; female connector
Pole number 2	40
Connection type 2	System



Physical data	
Cable length	2 m

Material Data	
Fire load	0 MJ
Weight	382 g

Environmental requirements	
Ambient temperature (operation at U _N)	-20 ... +50 °C

Commercial data	
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Bag
Country of origin	FR
GTIN	4055143976664
Customs tariff number	85444290900

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 706-150/340-200	