



- Protection against overvoltage and high surge conditions caused by direct or indirect lightning strikes
- Types with plug-in cartridge provide fast servicing capability
- Mechanical indicator for visual failure status signalling of single modules
- Versions with or without output for remote SPD status indication
- Versions for data and signal lines
- Versions for photovoltaic applications.

Surge protection devices (SPD)

Type 1 and 2 monoblock $I_{imp}=25kA$	15 - 4
Type 1 and 2 with plug-in cartridge $I_{imp}=12.5kA$	15 - 4
Type 1 and 2 monoblock $I_{imp}=12.5kA$	15 - 4
Type 2 with plug-in cartridge $I_n=20kA$	15 - 5
Type 2 with plug-in cartridge $I_n=5kA$	15 - 5
Type 3 with plug-in cartridge $U_{oc}/I_{cw}=10kV/5kA$	15 - 6
Type 3 compact versions $U_{oc}/I_{cw}=6kV/3kA$	15 - 6
Type C2-D1 for data and signal lines $I_n=10kA$	15 - 6
Type 1 and 2 for photovoltaic applications $U_{cpv}=1100VDC$	15 - 7
Type 2 for photovoltaic applications $U_{cpv}=600VDC, 1100VDC$ and $1500VDC$	15 - 7

Dimensions	15 - 8
Wiring diagrams	15 - 9
Technical characteristics	15 - 11



Pag. 15-4

SURGE PROTECTION DEVICES TYPE 1 AND 2 MONOBLOCK VERSIONS $I_{imp}=25kA$

- 1P, 1P+N, 2P, 3P, 3P+N, 4P
- IEC impulse current I_{imp} (10/350 μ s): 25kA
- IEC maximum discharge current I_{max} (8/20 μ s): 100kA
- SPD status indicator
- Version with output for remote status indication.



Pag. 15-4

SURGE PROTECTION DEVICES TYPE 1 AND 2 VERSIONS WITH PLUG-IN CARTRIDGE $I_{imp}=12.5kA$

- 1P, 1P+N, 2P, 3P, 3P+N, 4P
- IEC impulse current I_{imp} (10/350 μ s): 12.5kA
- IEC maximum discharge current I_{max} (8/20 μ s): 60kA
- IEC combined surge U_{oc}/I_{sc} (1.2/50, 8/20 μ s): 10kV/5kA
- Single module status indicator
- Version with output for remote status indication.



Pag. 15-4

SURGE PROTECTION DEVICES TYPE 1 AND 2 MONOBLOCK VERSIONS $I_{imp}=12.5kA$

- 1P, 1P+N, 2P, 3P, 3P+N, 4P
- IEC impulse current I_{imp} (10/350 μ s): 12.5kA
- IEC maximum discharge current I_{max} (8/20 μ s): 50kA
- SPD status indicator
- Version with output for remote status indication.



Pag. 15-5

SURGE PROTECTION DEVICES TYPE 2 VERSIONS WITH PLUG-IN CARTRIDGE $I_n=20kA$

- 1P, 1P+N, 2P, 3P, 3P+N, 4P
- IEC maximum discharge current I_{max} (8/20 μ s): 50kA
- IEC rated discharge current I_n (8/20 μ s): 20kA
- Single module status indicator
- Versions with and without output for remote status indication.



Pag. 15-5

SURGE PROTECTION DEVICES TYPE 2 VERSIONS WITH PLUG-IN CARTRIDGE $I_n=5kA$

- 1P, 1P+N, 2P, 3P, 3P+N, 4P
- IEC maximum discharge current I_{max} (8/20 μ s): 15kA
- IEC rated discharge current I_n (8/20 μ s): 5kA
- Single module status indicator
- Versions with and without output for remote status indication.



Pag. 15-6

SURGE PROTECTION DEVICES TYPE 3 VERSIONS WITH PLUG-IN CARTRIDGE $U_{oc}/I_{cw}=10kV/5kA$

- 1P+N
- Version with plug-in cartridge
 - IEC rated current I_n (8/20 μ s): 5kA
 - Combined impulse U_{oc} : 10kV
 - SPD status indicator
 - Output for remote status indication
- Acoustic or optical intervention indicator.



Pag. 15-6

SURGE PROTECTION DEVICES TYPE 3 COMPACT VERSIONS $U_{oc}/I_{cw}=6kV/3kA$

- 1P+N
- Compact version
 - IEC rated current I_n (8/20 μ s): 3kA
 - Combined impulse U_{oc} : 6kA
- Acoustic or optical intervention indicator.



Pag. 15-6

SURGE PROTECTION DEVICES TYPE C2-D1 FOR DATA AND SIGNAL LINES $I_n=10kA$

- Version for line RS485
 - Rated voltage U_n : 5VDC
 - C2 Rated current I_n (8/20 μ s): 10kA
 - D1 Impulse current I_{imp} (10/350 μ s): 2.5kA
 - Output for remote status indication
- Version for Ethernet line Cat.6 - POE
 - Rated voltage U_n : 48VDC
- C2 Rated current I_n (8/20 μ s) L-PE: 10kA
- D1 Impulse current I_{imp} (10/350 μ s): 1kA.



Page 15-7

SURGE PROTECTION DEVICES TYPE 1 AND 2 AND TYPE 2 FOR PHOTOVOLTAIC APPLICATIONS

- Versions with plug-in cartridge: +, -, PE
- IEC maximum operational voltage: 1500VDC
- IEC maximum discharge current I_{max} (8/20 μ s): 40kA
- IEC rated discharge current I_n (8/20 μ s): 20kA
- Single module status indicator
- Versions with or without output for remote status indication
- Tested according to EN/BS 50539-11.

SAFE INSTALLATIONS!

	Type 1, 2				Type 3
LPZ protection zones	0 _A 0 _B	1	2	3	
Installation category	IV	III	II	I	
Impulse withstand voltage of equipment	6kV	4kV	2.5kV	1.5kV	

SURGE PROTECTION DEVICES

The surge arresters commonly defined as SPDs (Surge Protection Devices), are devices designed to protect electric systems and equipment against transient and impulse overvoltages such as those caused by lightning strikes and by electric switching.

Their function is to divert the discharge or impulse current generated by an overvoltage to earth/ground, thereby protecting the equipment downstream.

SPDs are installed in parallel with the electric line to be protected. At the mains rated voltage, they are comparable to an open circuit and have a high impedance at their ends.

In the presence of an overvoltage, this impedance falls to very low values, closing the circuit to earth/ground.

Once the overvoltage has ended, their impedance rises again rapidly to the initial value (very high), returning to open loop conditions.

The SA1B and SA0B (monoblock) type protects against direct and indirect lightning strikes as well as induced overvoltage conditions. It can be installed in areas with a high risk of direct lightning strikes, inside main distribution boards or nearby sub-distribution boards. With the SA0 plug-in cartridge type, the same features are available with the advantage of only having to replace the protection cartridge once the SPD blows.

PROTECTION ZONES

Standards define the LPZs (Lightning Protection Zones), which indicate the different zones at risk. These are distinguished among:

LPZ 0A: Area outside a building not protected by LPS (e.g. lightning rods) where a direct lightning strike is possible. In this zone, there is total exposure to induced electromagnetic fields.

LPZ 0B: Area outside a building protected by LPS; therefore, a direct lightning strike is not possible. In this zone, there is total exposure to induced electromagnetic fields.

LPZ 1: Area inside a building so protected against direct lightning strikes. In this zone, there is the possibility of very high overvoltages and of induced electromagnetic fields which may be attenuated depending on the degree of screening. This zone must be protected by an SPD type 1 at the boundary with zone LPZ 0A or 0B.

LPZ 2: Area inside a building (e.g. in a room), in which there is the possibility of low overvoltages since they are limited by SPDs installed upstream. This zone must be protected by an SPD type 2 at the boundary with zone LPZ 1.

LPZ 3: Area inside a building (e.g. the system connected to a socket in a room) characterised by very sensitive equipment, in which there is the possibility of very low overvoltages as they are limited by SPDs installed upstream. This zone must be protected by an SPD type 3 at the boundary with zone LPZ 2.

INSTALLATION CATEGORY

For the correct choice of the SPD, the dielectric strength of the equipment to protect needs to be considered. This level is established by IEC 60664-1 standard.

For a 230/400V installation, it specifies:

Installation category IV: 6kV for devices installed upstream of the distribution board (for example, delivery point with the distribution system)


Installation category III: 4kV for devices being part of the fixed system (for example, distribution boards, switching devices, isolators, ducting and their accessories)

Installation category II: 2.5kV for non electronic devices (for example, household appliances or electric tools)

Installation category I: 1.5kV for equipment containing "particularly sensitive" electronic circuits (for example, electronic devices like PCs or TVs).

RECOMMENDATIONS FOR INSTALLATION

For correct installation, it is advisable to make connections between the line and the SPD input (phase or neutral terminals) as well as between the SPD output (earth/ground terminal) and the equipotential bonding connection with a maximum 0.5m/20" length of the leads. To reduce the distance, use of the so-called "V connection" is admissible.

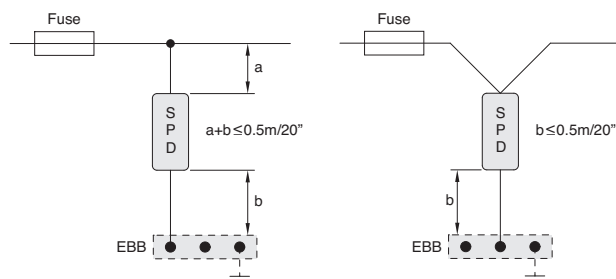


For more details, IEC/EN/BS 62305 standards can be consulted.

Type 2 DC

SURGE PROTECTION DEVICES FOR PHOTOVOLTAIC APPLICATIONS


In photovoltaic applications in a domestic environment or industrial facility or other similar circumstances, equipped with lightning rod systems having a safety distance (S), SPD type 2, suitable for DC duty, can be used to protect the installation. It is advisable to install these devices as close as possible to the photovoltaic panels, consequently in the so-called string boards. If the AC/DC inverter is far away from the string boards (indicatively more than 10m/33' apart), another SPD type 2 DC needs to be installed next to the inverter on the DC side. Installation of SPD type 2 suitable of AC duty is also required downstream of the inverter on the AC side. For more details, consult specific national standards and/or application guides issued by local authorities for solar systems concerning protection against lightning. The SG2DG... types with plug-in cartridges are suitable for connection in the DC side of a solar installation and offer protection against induced overvoltage conditions. The SG2...A300 type is suitable for installation downstream of the inverter on the AC side and in intermediate panels.

Industrial buildings

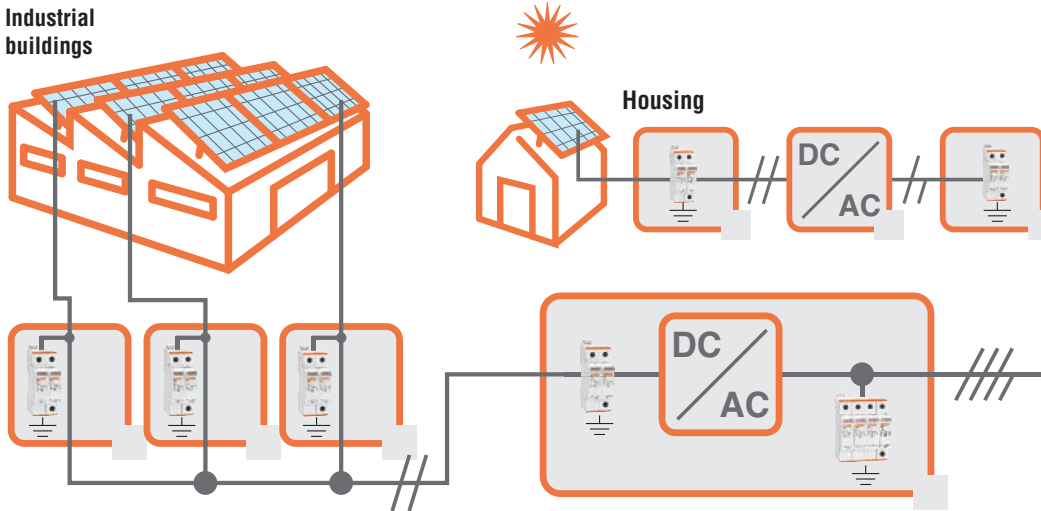

BACKUP PROTECTION

Protection against short circuits of SPDs is provided by overcurrent devices (g/L/gG fuses), which should be chosen according to the SPD manufacturer's recommendations.



Fuse size depends on SPD

SPD COORDINATION

In order to obtain an effective protection against overvoltage, it is advisable to install several SPDs coordinated with one another in cascade connection. For instance, it is advisable to have a type 1 SPD in the main distribution board, a Type 2 SPD in the sub-distribution board and a type 3 SPD near the terminal equipment to be protected. In this way, the energy originating from an overvoltage gradually decreases as it reaches the equipment to protect.

DEFINITIONS AND RATINGS ACCORDING TO IEC/EN/BS

Maximum continuous voltage U_c :


Maximum value of AC or DC voltage that the SPD is capable of permanently withstanding without activating or getting damaged; this is its rated voltage.

Protection level voltage U_p :

Maximum value of the voltage between the terminals of the SPD in presence of an impulsive overvoltage. It is a fundamental parameter to correctly choose the SPD; it must be taken into account with regards to the impulse voltage of the equipment to protect.


Impulse current I_{imp} :

Crest value of the current that circulates in the SPD with a 10/350 μ s waveform (activation must be guaranteed for 20 times without damage). It is used to classify SPDs in test class I.




Rated discharge current I_n :

Crest value of the current that circulates in the SPD with an 8/20 μ s waveform (activation must be guaranteed for 20 times without damage). It is used to classify SPDs in test class II.



Open circuit discharge voltage U_{oc} :


Crest value of the no-load discharge voltage delivered by the test generation with a 1.2/50 μ s waveform simultaneously with a short circuit current of an 8/20 μ s waveform, applied at the SPD terminals. It is used to classify SPDs in test class III.



Monoblock Iimp=25kA



SA1B1PA320R



SA1B3NA320R

Order code	Pole arrangement	Relay output	Number of DIN modules	Qty per pkg	Wt
		(SPDT)		n°	[kg]

MONOBLOCK VERSION.
IEC impulse current Iimp (10/350μs) 25kA per pole.

SA1B1PA320R	1P	YES	2	1	0.275
SA1B1NA320R	1P+N	YES	4	1	0.390
SA1B2PA320R	2P	YES	4	1	0.395
SA1B3PA320R	3P	YES	6	1	0.595
SA1B3NA320R	3P+N	YES	8	1	0.760
SA1B4PA320R	4P	YES	8	1	0.780

Main characteristics

The surge protection device type SA1B combines the performance of SPD type 1 and 2 into a single product. It protects against direct and indirect lightning strikes as well as induced overvoltage conditions. It can be installed in areas with a high risk of direct lightning strikes, inside main distribution boards or nearby sub-distribution boards.

Operational characteristics

- IEC maximum continuous operating voltage U_c: 320VAC
- IEC maximum discharge current I_{max} (8/20μs): 100kA per pole
- IEC rated discharge current I_n (8/20μs): 25kA per pole
- Version with relay output having changeover contact for remote status indication
- IEC degree of protection: IP20.

Certifications and compliance

Certification obtained: EAC.
Compliant with standards: IEC/EN/BS 61643-11.

Characteristics

Type	IEC rated voltage U _n [V]	IEC voltage protection level U _p [kV] L-N	Power installation system
SA1B1PA320R	230	<1.4	TN-C, TN-S, TT ^①
SA1B1NA320R	230	<1.4/1.3	TT, TN-S
SA1B2PA320R	230	<1.4	TN-S
SA1B3PA320R	230/400	<1.4	TN-C
SA1B3NA320R	230/400	<1.4/1.5	TT, TN-S
SA1B4PA320R	230/400	<1.4	TN-S

① Between L-N only.

With plug-in cartridge Iimp=12.5kA



SA01PA320R



SA02PA320R



SAX00PA320

Order code	Pole arrangement	Relay output	Number of DIN modules	Qty per pkg	Wt
		(SPDT)		n°	[kg]

VERSION WITH PLUG-IN CARTRIDGE.
IEC impulse current Iimp (10/350μs) 12.5kA per pole.

SA01PA320R	1P	YES	1	1	0.195
SA01NA320R	1P+N	YES	2	1	0.365
SA02PA320R	2P	YES	2	1	0.370
SA03PA320R	3P	YES	3	1	0.540
SA03NA320R	3P+N	YES	4	1	0.670
SA04PA320R	4P	YES	4	1	0.670

PLUG-IN CARTRIDGE.

Order code	Description	Qty per pkg	Wt
		n°	[kg]
SAX00PA320	For SA0... type	1	0.100

Main characteristics

SURGE PROTECTION DEVICES TYPE SA0
It has a plug-in cartridge and combines the performance of SPD type 1 and 2 into a single product. It is ideal in all those systems of reduced extent to protect the load side downstream of main circuit breaker to terminal equipment. It protects against direct and indirect lightning strikes as well as induced overvoltage conditions. It can be installed inside main distribution boards and nearby terminal equipment. The protection cartridges are plug-in and can be easily replaced for quick servicing.

SURGE PROTECTION DEVICES TYPE SA0B

Monoblock version SPD, it combines the performance of SPD type 1 and 2 into a single product. It is ideal in all those systems of reduced extent to protect the load side downstream of main circuit breaker to terminal equipment. It protects against direct and indirect lightning strikes as well as induced overvoltage conditions. It can be installed inside main distribution boards and nearby terminal equipment. The protection cartridges are plug-in and can be easily replaced for quick servicing.

Operational characteristics

- IEC maximum continuous operating voltage U_c: 320VAC
- IEC maximum discharge current I_{max} (8/20μs) per pole: 60kA (SA0...); 50kA (SA0B...)
- IEC rated discharge current I_n (8/20μs): 25kA per pole (SA0...); 20kA (SA0B...)
- Versions with or without relay output having changeover contact for remote status indication
- IEC degree of protection: IP20.

Certifications and compliance

Certification obtained: EAC.
Compliant with standards: IEC/EN/BS 61643-11.

Characteristics

Type	IEC rated voltage U _n [V]	IEC voltage protection level U _p [kV] L-N	Power installation system
SA0...1PA...	230	<1.5	TN-C, TN-S, TT ^①
SA0...1NA...	230	<1.5	TT, TN-S
SA0...2PA...	230	<1.5	TN-S
SA0...3PA...	230/400	<1.5	TN-C
SA0...3NA...	230/400	<1.5	TT, TN-S
SA0...4PA...	230/400	<1.5	TN-S

① Between L-N only.

Order code	Pole arrangement	Relay output	Number of DIN modules	Qty per pkg	Wt
		(SPDT)		n°	[kg]

MONOBLOCK VERSION.
IEC impulse current Iimp (10/350μs) 12.5kA per pole.

SA0B1PA320R	1P	YES	2	1	0.205
SA0B1NA320R	1P+N	YES	2	1	0.155
SA0B2PA320R	2P	YES	2	1	0.230
SA0B3PA320R	3P	YES	3	1	0.330
SA0B3NA320R	3P+N	YES	4	1	0.600
SA0B4PA320R	4P	YES	4	1	0.600

Monoblock Iimp=12.5kA



SA0B1PA320R

With plug-in cartridge In=20kA



SG2...

Order code	Pole arrangement	Relay output	Number of DIN modules	Qty per pkg	Wt
				n°	[kg]

VERSION WITH PLUG-IN CARTRIDGES.
Rated discharge current In (8/20μs) 20kA per pole.

SG21PA300	1P	NO	1	1	0.128
SG21PA300R	1P	YES	1	1	0.135
SG21NA300	1P+N	NO	2	1	0.234
SG21NA300R	1P+N	YES	2	1	0.240
SG22PA300	2P	NO	2	1	0.252
SG22PA300R	2P	YES	2	1	0.266
SG23PA300	3P	NO	3	1	0.366
SG23PA300R	3P	YES	3	1	0.376
SG23NA300	3P+N	NO	4	1	0.477
SG23NA300R	3P+N	YES	4	1	0.486
SG24PA300	4P	NO	4	1	0.496
SG24PA300R	4P	YES	4	1	0.505

PLUG-IN CARTRIDGE.

Order code	Description	Qty per pkg	Wt
		n°	[kg]
SGX02PA300	For SG2...A300/300R types	1	0.100

In=5kA



SG2C...

Order code	Pole arrangement	Relay output	Number of DIN modules	Qty per pkg	Wt
		(SPDT)		n°	[kg]

VERSION WITH PLUG-IN CARTRIDGES.
Rated discharge current In (8/20μs) 5kA per pole.

SG2C1NA320	1P+N	NO	1	1	0.126
SG2C2PA320	2P	NO	1	1	0.144

Main characteristics

SURGE PROTECTION DEVICES TYPE SG2

They are available in plug-in cartridge version and they are suitable for installation in secondary boards and in terminal equipment.

They ensure protection against overvoltages conditions.

The protection cartridges are plug-in and can be easily replaced for quick servicing.

SG2 surge arresters are immune to temporary overvoltages (TOV) and block the circulation of the subsequent network current after the intervention.

SURGE PROTECTION DEVICES TYPE SG2C

They are available in plug-in cartridge version and suitable for installation in residential boards where a 5kA per pole indirect discharge protection is sufficient. They have compact size, 1 module width for two poles.

Operational characteristics

- IEC maximum continuous operating voltage Uc: 300VAC (SG2...)/320VAC (SG2C...)
- IEC maximum discharge current I_{max} (8/20μs): 50kA per pole (SG2...); 15kA (SG2C...)
- IEC rated discharge current In (8/20μs): 20kA per pole (SG2...); 5kA (SG2C...)
- Versions with or without relay output having changeover contact for remote status indication (SG2...)
- IEC degree of protection: IP20.

Certifications and compliance

Certification obtained: EAC.

Compliant with standards: IEC/EN/BS 61643-11.

Characteristics

Type	IEC rated voltage Un [V]	IEC voltage protection level Up [kV] L-N	Power installation system
SG21PA...	230	<1,5	TN-C, TN-S, TT ^①
SG2/SG2C1NA...	230	<1,5	TT, TN-S
SG2/SG2C2PA...	230	<1,5	TN-S
SG23PA...	230/400	<1,5	TN-C
SG23NA...	230/400	<1,5	TT, TN-S
SG24PA...	230/400	<1,5	TN-S

① Between L-N only.

Type 3 with plug-in cartridge

$U_{oc}/I_{cw} = 10\text{kV}/5\text{kA}$



SA31NA320R

Type 3 compact version

$U_{oc}/I_{cw} = 6\text{kV}/3\text{kA}$



SA31NA275MS



SA31NA275ML

Type C2-D1 for data and signal lines

$I_n = 10\text{kA}$



SASD5VR



SASDET6

Order code	Pole arrangement	Relay output	Number of DIN modules	Qty per pkg	Wt
		(SPDT)		n°	[kg]

VERSION WITH PLUG-IN CARTRIDGES.

Combined impulse U_{oc}/I_{cw} (1.2/50 μs , 8/20 μs) 10kV/5kA.

SA31NA320R	1P+N	YES	1	1	0.140
------------	------	-----	---	---	-------

Order code	Pole arrangement	Intervention signaling	Qty per pkg	Wt
			n°	[kg]

COMPACT VERSION.

Combined impulse U_{oc}/I_{cw} (1.2/50 μs , 8/20 μs) 6kV/3kA.

SA31NA275MS	1P+N	Acoustic	1	0.050
SA31NA275ML	1P+N	Optical	1	0.050

Order code	Application	Relay output	Qty per pkg	Wt
			n°	[kg]

MONOBLOCK VERSION.

Rated current C2 I_n (8/20 μs): 10kA.

SASD5VR	RS485	YES	1	0.058
SASDET6	Ethernet Cat.6 - POE	—	1	0.120

General characteristics

SURGE PROTECTION DEVICE TYPE SA3

They are available in pluggable cartridge version for installation on DIN rail or compact version for installation in terminal block or electrical conduit. They are used for protection of end users (electronic devices). The DIN rail version includes a relay output with exchange contact for status reporting. The compact versions are available with acoustic or light signaling and are provided with pre-wired connectors, length 11cm.

Operational characteristics

- IEC nominal voltage U_n : 230VAC
- IEC rated current I_n (8 / 20 μs): 5kA (SA3...A320R), 3kA (SA3...MS, SA3...ML)
- IEC combined impulse U_{oc} : 10kV (SA3...A320R), 6kV (SA3...MS, SA3...ML)
- IEC Protection level U_p <1.5kV
- IEC degree of protection: IP20.

Certifications and compliance

Certification obtained: EAC.

Compliant with standards: IEC/EN/BS 61643-11.

General characteristics

Surge protection device for data lines type RS485 (5VDC) and Ethernet Cat. 6 Power Over Ethernet (POE).

Typically used for protection of televisions, data lines, PCs, video cameras, electronic control units, measuring devices, switches and routers.

Operational characteristics

TYPE SASD 5VR

- IEC rated voltage U_n : 5VDC
- C2 rated current I_n (8 / 20 μs): 10kA
- D1 impulse current I_{imp} (10 / 350 μs): 2.5kA
- IEC degree of protection: IP20.

TYPE SASD ET6

- IEC rated voltage U_n : 48VDC (POE)
- C2 rated current I_n (8 / 20 μs) L-PE: 10kA
- D1 limp impulsive current (10 / 350 μs): 1kA
- IEC degree of protection: IP20.

Certifications and compliance

Certification obtained: EAC.

Compliant with standards: IEC/EN/BS 61643-11.

15 Surge protection devices

Type 1 and 2 for photovoltaic application.
Type 2 for photovoltaic application

Type 1 and 2 with plug-in cartridge



SG2EDGK10M3R

new

Order code	Pole arrangement	Relay output	Number of DIN modules	Qty per pkg	Wt
		(SPDT)		n°	[kg]

EN rated voltage Un 1100VDC.

SG2EDGK10M3R	+, -, PE	YES	3	1	0.406
---------------------	----------	-----	---	---	-------

Type 2 with plug-in cartridge



SG2DG600M2...

new

Order code	Pole arrangement	Relay output	Number of DIN modules	Qty per pkg	Wt
		(SPDT)		n°	[kg]

EN rated voltage Un 600VDC.

SG2DG600M2	+, -, PE	NO	2	1	0.320
-------------------	----------	----	---	---	-------

SG2DG600M2R	+, -, PE	YES	2	1	0.325
--------------------	----------	-----	---	---	-------

EN rated voltage Un 1100VDC.

SG2DGK10M3	+, -, PE	NO	3	1	0.396
-------------------	----------	----	---	---	-------

SG2DGK10M3R	+, -, PE	YES	3	1	0.406
--------------------	----------	-----	---	---	-------

SA2EDGK10M3	+, -, PE	YES	3	1	0.406
--------------------	----------	-----	---	---	-------

EN rated voltage Un 1500VDC.

SG2DGK50M3	+, -, PE	NO	3	1	0.444
-------------------	----------	----	---	---	-------

new



SG2DGK10M3R

Plug-in cartridges



SGX02DG600M2

new

Order code	Description	Qty per pkg	Wt
		n°	[kg]

SGX02DG600M2	For SG2DG600M2/M2R type	1	0.100
---------------------	-------------------------	---	-------

SGX02DGK10M3	For SG2DGK10M3/M3R type	1	0.100
---------------------	-------------------------	---	-------

SGX02DGK50M3	For SG2DGK50M3 type	1	0.100
---------------------	---------------------	---	-------

Main characteristics

The surge protection device type SG2EDG..., SG2DG... and SA2EDG... with plug-in cartridge for photovoltaic applications is suitable for installation on the direct-current end of a photovoltaic installation and protects against induced overvoltage conditions.

The protection cartridges are plug-in and can be easily replaced for quick servicing.

Operational characteristics

- EN maximum continuous voltage Ucpv: 600VDC, 1100VDC, 1500VDC
- EN short circuit current rating Iscpv: 11kA for SG2EDG... and SG2DG..., 9kA per SA2EDG...
- Versions with or without relay output having changeover contact for remote status indication
- EN degree of protection: IP20.

Characteristics


Type	EN rated voltage Un [VDC]	EN continuous voltage Ucpv [VDC]	EN voltage protection level Up [kV]
SG2DG600M2	600	600	<1.9
SG2DG600M2R	600	600	<1.9
SG2DGK10M3	1100	1100	<3.8
SG2DGK10M3R	1100	1100	<3.8
SG2EDGK10M3R	1100	1100	<3.8
SA2EDGK10M3	1100	1100	<4.0
SG2DGK50M3	1500	1500	<5.0

Certifications and compliance


Certification obtained: EAC.

Compliant with standards: IEC/EN/BS 50539-11.


SA1B...A320R

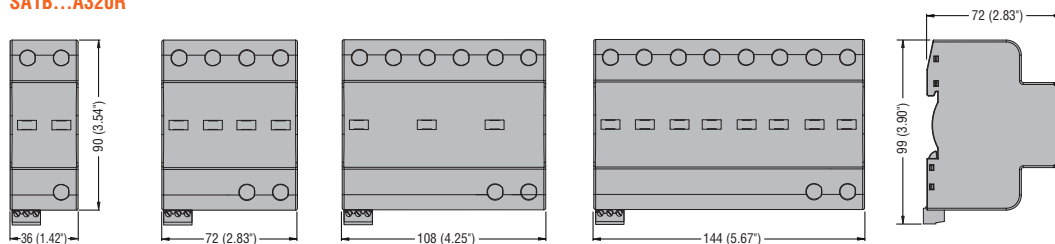


SA0...A320R

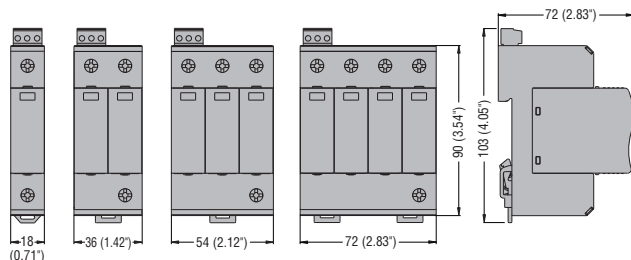


SA0B...A320R

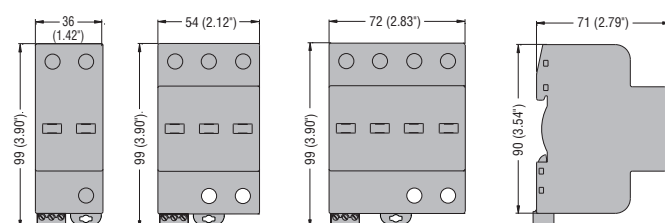


SG2...A300

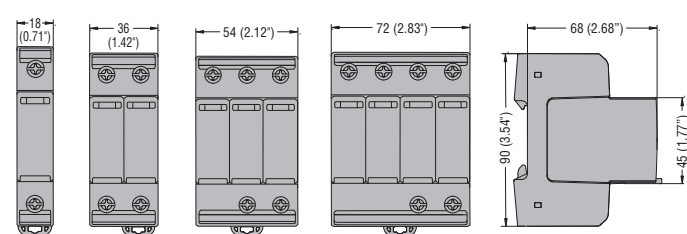


SG2C...A320




SG21PA300R




SG2...A300R

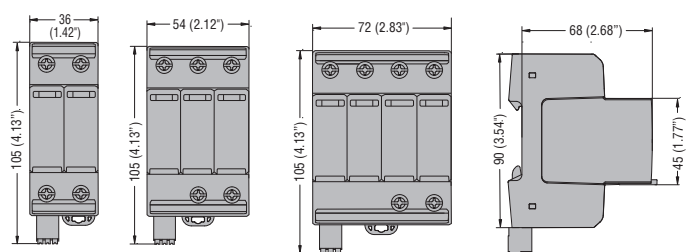


SG2DG600M2




SA2EDGK10M3




SG2DG600M2R




SG2DGK10M3




SG2DGK10M3R




SG2EDGK10M3R

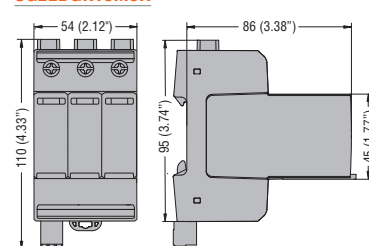


SA31NA320R




SA31NA275M...




SASD5VR




SASDET6




SA1B1PA320R




SA1B1NA320R




SA1B2PA320R




SA1B3PA320R

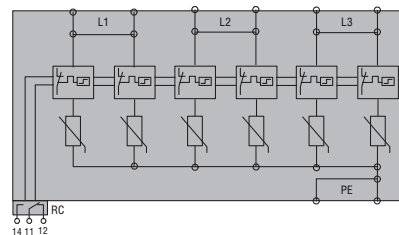


SA1B3NA320R

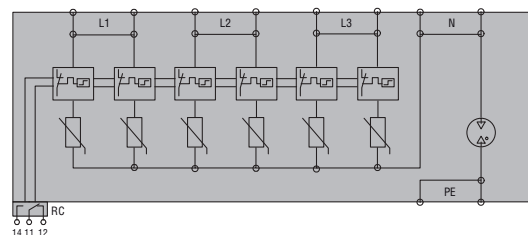


SA1B4PA320R

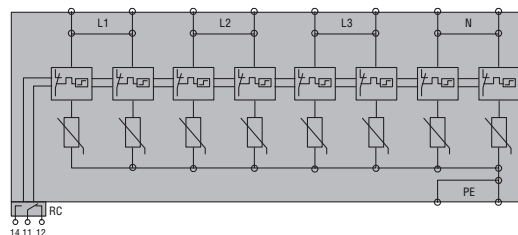


SA01PA320R




SA01NA320R




SA02PA320R




SA03PA320R




SA03NA320R




SA04PA320R




SA0B1PA320R




SA0B1NA320R




SA0B2PA320R




SA0B3PA320R


























SA0B3NA320R



SA0B4PA320R



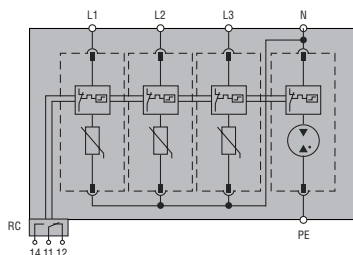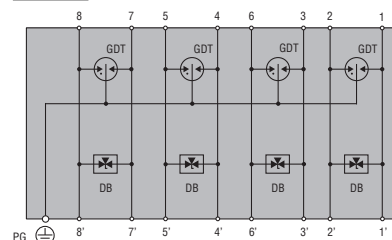SG21PA300**SG21NA300****SG22PA300****SG23PA300****SG23NA300****SG24PA300****SG21PA300R****SG21NA300R****SG22PA300R****SG23PA300R****SG23NA300R****SG24PA300R****SG2C1NA320****SG2C2PA320****SG2DG600M2****SG2DG600M2R****SG2DGK10M3
SG2DGK50M3
SA2EDGK10M3****SG2DGK10M3R
SG2EDGK10M3R****SA31NA230R****SA31NA275MS****SA31NA275ML****SASD5VR****SASDET6**

TYPE	with relay output	SA1B1PA320R	SA1B1NA320R	SA1B2PA320R	SA1B3PA320R	SA1B3NA320R	SA1B4PA320R
ELECTRICAL PROPERTIES							
SPD per IEC/EN/BS 61643-11		Type 1, 2 (test class I, II)					
IEC rated voltage Un	VAC	230	230	230	230 / 400	230 / 400	230 / 400
IEC maximum continuous voltage Uc	VAC	320					
IEC impulse current Iimp (10/350) (L-N/N-PE)	kA	25	25 / 50	25 per pole	25 per pole	25 / 100	25 per pole
IEC max impulse current Imax (8/20) (L-N/N-PE)	kA	100	100 / 100	100 per pole	100 per pole	100 / 100	100 per pole
IEC rated discharge current In (8/20) (L-N/N-PE)	kA	25	25 / 50	25 per pole	25 per pole	25 / 100	25 per pole
IEC voltage protection level Up (L-N/N-PE)	kV	<1.4	<1.4 / <1.3	<1.4	<1.4	<1.4 / <1.5	<1.4
IEC Temporary overvoltage (TOV) withstand Ut (L-N for 5s)	VAC	334					
IEC Temporary overvoltage (TOV) safe fail (L-N for 120min)	VAC	438					
IEC Temporary overvoltage (TOV) withstand (N-PE for 200ms)	VAC	–	1200V / 300A	–	–	–	1200V / 300A
IEC residual voltage Ures (L-N/N-PE) at 5kA (8/20)	kV	1	1	1	1.1	1.1	1.1
IEC follow current If (N-PE)	Arms	No	>100	No	No	>100	No
Tripping time ta (L-N/N-PE)	ns	<25	<25 / 100	<25	<25	<25 / 100	<25
Thermal isolation protection		Yes					
Backup protection fuse (gL/gG) in case of main fuse >250A	A min	125 (Iimp=10kA)					
	A max	250					
IEC maximum short circuit current 50Hz	kA	50					
Status indicator - operating / failure	colour	Green / Red					
CONNECTIONS							
IEC degree of protection		IP20					
Terminal tightening torque	Nm	3					
Maximum conductor section	mm²	25 (flexible) / 35 (rigid)					
RELAY OUTPUT FOR REMOTE STATUS INDICATION							
Type of contact		Changeover (NO/NC - SPDT)					
Contact capacity	A	0.5A at 250VAC; 3A at 125VAC; 0.1A at 250VDC; 0.2A at 125VDC					
Contact terminal tightening torque	Nm	0.25					
Maximum contact conductor section	mm²	1.5					
AMBIENT CONDITIONS							
Operating temperature		-40...+80°C					
Fixing		On 35mm DIN rail (IEC/EN/BS 60715)					
Material		Thermoplastic, RAL 7035, UL 94 V-0					

15 Surge protection devices

Technical characteristics

TYPE	with relay output	SA01PA320R	SA01NA320R	SA02PA320R	SA03PA320R	SA03NA320R	SA04PA320R
ELECTRICAL PROPERTIES							
SPD per IEC/EN/BS 61643-11		Type 1, 2 (test class I, II)					
IEC Rated voltage Un	VAC	230	230	230	230 / 400	230 / 400	230 / 400
IEC maximum continuous voltage Uc	VAC	320					
IEC impulse current Iimp (10/350) (L-N/N-PE)	kA	12.5	12.5 / 50	12.5 per pole	12.5 per pole	12.5 / 50	12.5 per pole
IEC max discharge current Imax (8/20) (L-N/N-PE)	kA	60	60 / 50	60 per pole	60 per pole	60 / 50	60 per pole
IEC rated discharge current In (8/20) (L-N/N-PE)	kA	25	25 / 30	25 per pole	25 per pole	25 / 30	25 per pole
IEC combined surge Uoc/Isc (1.2/50, 8/20)	kV/kA	10 / 5					
IEC voltage level protection Up (L-N/N-PE)	kV	<1.5	<1.5 / <1.7	<1.5	<1.5	<1.5 / <1.7	<1.5
IEC Temporary overvoltage (TOV) withstand Ut (L-N for 5s)	VAC	334					
IEC Temporary overvoltage (TOV) withstand (N-PE for 200ms)	VAC	–	–	1200V / 300A	–	1200V / 300A	–
IEC residual voltage Ures (L-N/N-PE) at 5kA (8/20)	kV	0.8	0.8 / 0.2	0.8	0.8	0.8 / 0.2	0.8
IEC follow current If (N-PE)	Arms	No	>100	No	No	>100	No
Tripping time ta (L-N/N-PE)	ns	<25	<25 / 100	<25	<25	<25 / 100	<25
Thermal isolation protection		Yes					
Backup protection fuse (gG) in case of main fuse >160A	A min	125 (Iimp=10kA)					
	A max	160					
IEC maximum short circuit current 50Hz	kA	25					
Status indicator - operating / failure	colour	– / Red					
CONNECTIONS							
IEC degree of protection		IP20					
Terminal tightening torque	Nm	3					
Maximum conductor section	mm²	25 (flexible) / 35 (rigid)					
RELAY OUTPUT FOR REMOTE STATUS INDICATION							
Type of contact		Changeover (NO/NC - SPDT)					
Contact capacity	A	0.5A at 250VAC; 3A at 125VAC; 0.1A at 250VDC; 0.2A at 125VDC					
Contact terminal tightening torque	Nm	0.25					
Maximum contact conductor section	mm²	1.5					
AMBIENT CONDITIONS							
Operating temperature		-40...+80°C					
Fixing		On 35mm DIN rail (IEC/EN/BS 60715)					
Material		Thermoplastic, RAL 7035, UL 94 V-0					

TYPE	with relay output	SA0B1PA320R	SA0B1NA320R	SA0B2PA320R	SA0B3PA320R	SA0B3NA320R	SA0B4PA320R
ELECTRICAL PROPERTIES							
SPD per IEC/EN/BS 61643-11		Type 1, 2 (test class I, II)					
IEC Rated voltage Un	VAC	230	230	230	230 / 400	230 / 400	230 / 400
IEC maximum continuous voltage Uc	VAC	320					
IEC impulse current Iimp (10/350) (L-N/N-PE)	kA	12.5	12.5 / 50	12.5	12.5	12.5 / 50	12.5
IEC max discharge current Imax (8/20) (L-N/N-PE)	kA	50	50 / 100	50	50	50 / 100	50
IEC rated discharge current In (8/20) (L-N/N-PE)	kA	20	20 / 50	20	20	20 / 50	20
IEC voltage level protection Up (L-N/N-PE)	kV	<1.5	<1.5 / <1.5	<1.5	<1.5	<1.5 / <1.5	<1.5
IEC Temporary overvoltage (TOV) withstand Ut (L-N for 5s)	VAC	334					
IEC Temporary overvoltage (TOV) safe fail (L-N for 120min)	VAC	438					
IEC Temporary overvoltage (TOV) withstand (N-PE for 200ms)	VAC	–	–	1200V / 300A	–	1200V / 300A	–
IEC follow current If (N-PE)	Arms	No	>100	No	No	>100	No
Tripping time ta (L-N/N-PE)	ns	<25	<25 / 100	<25	<25	<25 / 100	<25
Thermal isolation protection		Yes					
Backup protection fuse (gG) in case of main fuse >250A	A min	125 (Iimp=10kA)					
	A max	250					
IEC maximum short circuit current 50Hz	kA	50					
Status indicator - operating / failure	colour	Green / Red					
CONNECTIONS							
IEC degree of protection		IP20					
Terminal tightening torque	Nm	3					
Maximum conductor section	mm²	25 (flexible) / 35 (rigid)					
RELAY OUTPUT FOR REMOTE STATUS INDICATION							
Type of contact		Changeover (NO/NC - SPDT)					
Contact capacity	A	0.5A at 250VAC; 3A at 125VAC					
Contact terminal tightening torque	Nm	0.25					
Maximum contact conductor section	mm²	1.5					
AMBIENT CONDITIONS							
Operating temperature		-40...+85°C					
Fixing		On 35mm DIN rail (IEC/EN/BS 60715)					
Material		Thermoplastic, RAL 7035, UL 94 V-0					

TYPE	without relay output	SG21PA300	SG21NA300	SG22PA300	SG23PA300	SG23NA300	SG24PA300
	with relay output	SG21PA300R	SG21NA300R	SG22PA300R	SG23PA300R	SG23NA300R	SG24PA300R
ELECTRICAL PROPERTIES							
SPD per IEC/EN/BS 61643-11		Type 2 (test class II)					
IEC Rated voltage Un	VAC	240	240	240	240 / 400	240 / 400	240 / 400
IEC maximum continuous voltage Uc	VAC	300					
IEC max discharge current Imax (8/20) (L-N/N-PE)	kA	50	50 / 65	50	50	50 / 65	50
IEC rated discharge current In (8/20) (L-N/N-PE)	kA	20	20 / 40	20	20	20 / 40	20
IEC level protection Up (L-N/N-PE)	kV	<1.5	<1.5 / <1.5	<1.5	<1.5	<1.5 / <1.5	<1.5
IEC temporary overvoltage (TOV) Ut (L-N for 5s)	VAC	337					
IEC follow current If (N-PE)	Arms	No	100	No	No	100	No
Tripping time ta (L-N/N-PE)	ns	<25	<25 / 100	<25	<25	<25 / 100	<25
Thermal isolation protection		Yes					
Backup protection fuse (gG) in case of main fuse >315A and Ik<25kA or in case of main fuse >250A and Ik<50kA	A min	125					
	A max	315A with Isccr=25kA, 250A with Isccr=50kA					
IEC maximum short circuit current 50Hz	kA	25 / 50					
Status indicator - operating / failure	colour	Green / Red					
CONNECTIONS							
IEC degree of protection		IP20					
Terminal tightening torque	Nm	4.5					
Maximum conductor section	mm²	25 (flexible) / 35 (rigid)					
RELAY OUTPUT FOR REMOTE STATUS INDICATION							
Type of contact		Changeover (NO/NC - SPDT)					
Contact capacity	A	1A at 250VAC; 1A at 125VAC; 0.5A at 48VDC; 0.5A at 24VDC; 0.5A at 12VDC					
Maximum contact conductor section	mm²	1.5					
AMBIENT CONDITIONS							
Operating temperature		-40...+85°C					
Fixing		On 35mm DIN rail (IEC/EN/BS 60715)					
Material		Thermoplastic, RAL 7035, UL 94 V-0					

TYPE	without relay output	SG2C1NA320		SG2C2PA320
ELECTRICAL PROPERTIES				
SPD per IEC/EN/BS 61643-11		Type 2 (test class II)		
IEC Rated voltage Un	VAC	230		
IEC maximum continuous voltage Uc	VAC	320		
IEC max discharge current I _{max} (8/20) (L-N/N-PE)	kA	15/35	15	
IEC rated discharge current I _n (8/20) (L-N/N-PE)	kA	5/20	5	
IEC voltage level protection Up	kV	<1.5		
IEC temporary overvoltage (TOV) Ut (L-N for 5s)	VAC	335		
IEC follow current I _f (N-PE)	Arms	>100	No	
Tripping time t _a (L-N/N-PE)	ns	<25 / 100	<25	
Thermal isolation protection		Yes		
Backup protection fuse (gG) in case of main fuse >63A	fuse A	63 gG		
IEC maximum short circuit current 50Hz	kA	6		
Status indicator - operating / failure	colour	- / Red		
CONNECTIONS				
IEC degree of protection		IP20		
Terminal tightening torque	Nm	0.5 (L,N); 3 (PE)		
Maximum conductor section	mm ²	L,N: 4 (flexible) / 6 (rigid) PE: 25 (flexible) / 35 (rigid)		
AMBIENT CONDITIONS				
Operating temperature		-40...+85°C		
Fixing		On 35mm DIN rail (IEC/EN/BS 60715)		
Material		Thermoplastic, RAL 7035, UL 94 V-0		

TYPE		SA31NA320R	SA31NA275MS	SA31NA275ML
ELECTRICAL PROPERTIES				
SPD per IEC/EN/BS 61643-11		Type 3 (test class III)		
IEC Rated voltage Un	VAC	230	230	
IEC maximum continuous voltage Uc	VAC	320	275	
Combined impulse (1.2/50; 8/20) Uoc/Icw	kV/kA	10/5	6/3	
IEC max discharge current Imax (8/20)	kA	10	–	
IEC level protection Up (L-N/N-PE)	kV	<1.5	<1.5 / <1.7	
IEC temporary overvoltage (TOV) Ut (L-N for 5s)	VAC	337		
Tripping time ta (L-N/N-PE)	ns	<100ns		
IEC backup protection	A	63A fuse gG (line fuse >63 A)	MCB/B 16A (if MCB >16A)	
IEC maximum short circuit current 50Hz	kA	10	1	
Status indicator - operating / failure		Red replace + relay output	Acoustic (Buzzer)	Optical (LED)
CONNECTIONS				
IEC degree of protection		IP20		
Terminal tightening torque (L-N / PE)	Nm	0.5 / 3	–	
Maximum conductor section	mm²	L-N: 4 (flexible) / 6 (rigid); PE: 25 (flexible) / 35 (rigid)	1 (rigid)	
RELAY OUTPUT FOR REMOTE STATUS INDICATION				
Type of contact		Changeover (NO/NC - SPDT)	–	
Contact capacity	A	0.5A at 250VAC; 3A at 125VAC	–	
Contact terminal tightening torque	Nm	0.25	–	
Maximum contact conductor section	mm²	1.5	–	
AMBIENT CONDITIONS				
Operating temperature		-40...+85°C		
Fixing		On 35mm DIN rail (IEC/EN/BS 60715)	Socket circuit, terminal block, electrical conduct	
Material		Thermoplastic, RAL 7035, UL 94 V-0		

TYPE	for data and signal lines	SASD5VR	SASDET6
ELECTRICAL PROPERTIES			
SPD according to IEC/EN/BS 61643-21		D1/C1/C2/C3 types	
Application		RS485	Ethernet Cat.6, Power over Ethernet (POE)
IEC rated voltage U_n	VDC	5	48
IEC maximum continuous voltage U_c	VDC	6	50
C2 rated current I_n (8/20)	kA	10	10
Maximum discharge current I_{max} (8/20)	kA	20	10
D1 impulse current I_{imp} (10/350)	kA	2.5	1
EN residual voltage U_{res} at 5kA (8/20)	V	<22	–
Protection level U_p (L-L / L-PE)	V	–	150 / 550
Load current I_L at 25°C	A	1	1
Tripping time t_a	ns	<1	<1
Line resistance	Ω	1.6...2.0	–
Capacity	pF	50	–
Bandwidth	MHz	30	250, Cat.6
CONNECTIONS			
IEC degree of protection		IP20	
Terminal tightening torque	Nm	0.5	(RJ45 sockets)
Conductor section (L / PE)	mm ²	4 (max) / 6 (min)	–
RELAY OUTPUT FOR REMOTE STATUS INDICATION			
Type of contact		NC	–
Contact capacity	A	0.5A 250VAC; 1A 50VDC	–
Maximum contact conductor section	mm ²	0.3...4	–
AMBIENT CONDITIONS			
Operating temperature		-40...+80°C	
Fixing		On 35mm DIN rail (IEC/EN/BS 60715)	
Material		Thermoplastic, V-0	Metal

TYPE	without relay output	–	SG2DG600M2	SG2DGK10M3	SG2DGK50M3	SA2EDGK10M3
	with relay output	SG2EDGK10M3R	SG2DG600M2R	SG2DGK10M3R	–	–
ELECTRICAL PROPERTIES						
SPD according to EN/BS 50539-11		Type 1 and 2 (test class I and II)	Type 2 (test class II)			
IEC rated voltage Un	VDC	1100	600	1100	1500	1100
Maximum continuous voltage Ucpv	VDC	1100	600	1100	1500	1100
IEC impulse current Iimp (10/350)	kA	6.25	–	–	–	–
Maximum discharge current Imax (8/20)	kA	40	40	40	30	40
Rated discharge current In (8/20)	kA	20	20	20	20	20
Protection level Up	kV	<3.8	<1.9	<3.8	<5.0	<4.0
EN residual voltage Ures at 5kA (8/20)	kV	–	1.5	–	–	–
Tripping time ta	ns	<25				
Thermal isolation protection		Yes				
EN maximum short circuit current Iscpv	A	11kA	11kA			9kA
Status indication - operating / failure	colour	Green / Red				
CONNECTIONS						
EN degree of protection		IP20				
Terminal tightening torque	Nm	4.5	4.5			2.5
Maximum conductor section	mm²	25 (flexible) / 35 (rigid)				
RELAY OUTPUT FOR REMOTE STATUS INDICATION						
Type of contact		Changeover (NO/NC)				
Contact capacity	A	1A 250VAC; 1A 125VAC; 0.5A 48VDC; 0.5A 24VDC; 0.5A 12VDC				
Maximum contact conductor section	mm²	1.5				
AMBIENT CONDITIONS						
Operating temperature		40...+85°C				
Fixing		On 35mm DIN rail (IEC/EN/BS 60715)				
Material		Thermoplastic, RAL 7035, UL 94 V-0				