

IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST CERTIFICATES FOR ELECTRICAL EQUIPMENT (IECEE) CB SCHEME

CB TEST CERTIFICATE

Product

Connecting box

Name and address of the applicant

LEGRAND FRANCE
128 AVENUE DU MARECHAL DE LATTRE DE TASSIGNY
87045 LIMOGES CEDEX
FRANCE

Name and address of the manufacturer

LEGRAND FRANCE
128 AVENUE DU MARECHAL DE LATTRE DE TASSIGNY
87045 LIMOGES CEDEX
FRANCE

Name and address of the factory

LEGRAND FRANCE
128 AVENUE DU MARECHAL DE LATTRE DE TASSIGNY
87045 LIMOGES CEDEX
FRANCE

Note: When more than one factory, please report on page 2

 Additional Information on page 2

Ratings and principal characteristics

See Annex

Trademark (if any)



Customer's Testing Facility (CTF) Stage used

/

Model / Type Ref.

ASL
References: 0 860 57, 0 973 64, 0 976 24, 397 445, 0 861 57

Additional information (if necessary may also be reported on page 2)

Supersedes CBTC 640022 dated 27/09/2013 : update standard and addition of product references

 Additional Information on page 2

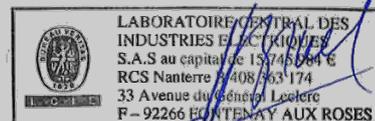
A sample of the product was tested and found to be in conformity with

IEC 60670-1:2015
IEC 60670-22:2003 + A1:2015

As shown in the Test Report Ref. No. which forms part of this Certificate

159772-732832

This CB Test Certificate is issued by the National Certification Body

LCIE – Laboratoire Central des Industries Electriques
33, avenue du Général Leclerc – BP8
FR 92 266 Fontenay aux Roses Cedex
www.lcie.fr

Date: 17/06/2019

Signature: Jean-Francois BRUEL
Certification Officer

ANNEX

References, ratings and main characteristics

Reference	Specificity	Colour
0 860 57	Complete unit	White
0 973 64		
0 976 24		
397 445		
0 861 57	Mechanism + cover plate, without mounting frame	

Classification

Rated insulation voltage	250V~ / 450V~	
Rated connecting capacity	3 x 2,5mm ² / 4 x 2,5mm ²	
Maximum number of conductors to be placed in the box	4	
Nature of their material	Insulating	
Method of installation	Surface mounting on	Combustible walls, ceilings, floors or furniture
Type of inlets (outlets)	With inlets, Inlets opening will be made during installation	
Clamping means	With cable anchorage	
Minimum and maximum temperatures during installation	From -5°C to +60°C	
Method of fixing the terminals or connecting devices in the connecting box	With integrated clamping units	

Accessories

Reference	Specificity	Description
0 860 91	1 gang	Surface mounting frame
0 860 92	2 gang	
0 860 93	3 gang	

For more information relating to the ratings and the main characteristics please refer to the CB Test Report: 159772-732832



LCIE – Laboratoire Central des Industries Electriques
33, avenue du Général Leclerc – BP8
FR 92 266 Fontenay aux Roses Cedex
www.lcie.fr



Date: 17/06/2019

Signature: Jean-François BRUEL
Certification Officer