


Datový list | Obj. č.: 734-671

Izolační zarážka; 0,08–0,2 mm² „e“ (0,14 mm² „f“); 8 ks/pás; Světle šedá

<https://www.wago.com/734-671>

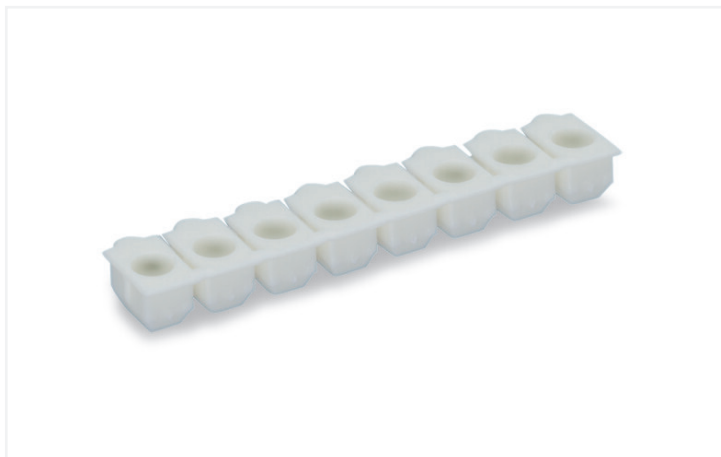

Barva: ■ Světle šedá

Mechanické údaje

Počet položek na pásu	8
Vhodné	Pro konektory (vidlice a zásuvky) s připojením CAGE CLAMP® (řada 734)

Údaje o materiálu

Upozornění k údajům o materiálu	Zde najdete informace o specifikaci materiálu
Barva	Světle šedá
Požární zatížení	0,007 MJ
Hmotnost	0,3 g

Obchodní údaje

Product Group	3 (Multi Conn. System)
eCl@ss 10.0	27-44-04-92
eCl@ss 9.0	27-44-04-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	200 (25) ks
Druh balení	Box
Země původu	DE
GTIN	4045454500771
Číslo celního tarifu	39269097900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Atesty/certifikáty

Approvals for marine applications



Schválení	Standardní	Název certifikátu
LR Lloyds Register	IEC 61984	96/20035 (E5)

Ke stažení

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 734-671



Documentation

Additional Information
Technical Section
03.04.2019
pdf 2010.85 KB



CAD/CAE-Data

CAD data
2D/3D Models 734-671




CAE data
ZUKEN Portal 734-671



Pokyny k instalaci

Instalace



Conductors with small cross-sections are highly flexible, and they deform when pushed against the conductor stop in connectors. As a result, the conductor insulation – not the copper conductor – may be clamped, causing intermittent contact or no contact at all.
The solution: an insulation stop for CAGE CLAMP®-equipped 734 Series Male and Female Connectors.