




Barva: ■ Černá

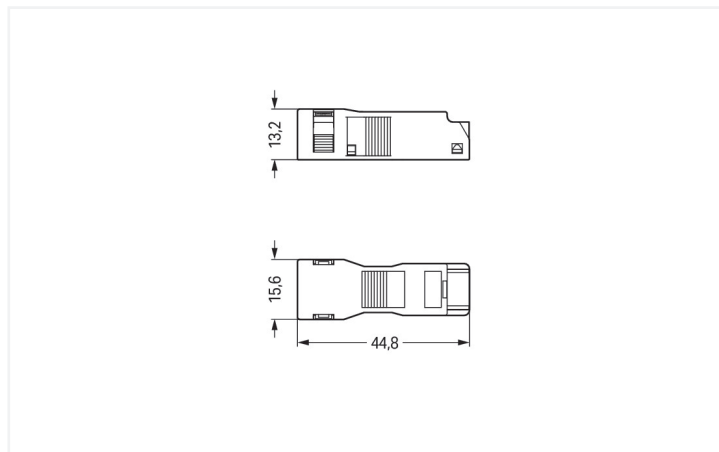

Rozměry v mm

Strain relief housing WINSTA® MINI 2-pole

The strain relief housing from the WINSTA® MINI product line is the intelligent solution for trouble-free electrical installation. You can rely on the level of quality of WINSTA® components from WAGO for your electrical installation accessories too. Where space is tight, our smallest pluggable connection system, WINSTA® MINI, consistently displays its advantageous properties. It saves space, and, thanks to Push-in CAGE CLAMP® spring pressure connection technology, it also can be installed quickly, since the installation is low-maintenance and can be performed without screw connections. The strip length is 32 mm.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

WINSTA® is the pluggable connection system that is perfectly tailored to the strict requirements of electrical installation. It ensures fast, secure and, above all, error-free installation of components and cables. Now you can also lower installation expenses without compromising quality and safety: with protection against mismatching eliminates the need for servicing and prevents unnecessary downtime.

- consistent IP40 protection
- rapid, structured electrical installation

Údaje o připojení

Připojení 1

Počet pólů	2
Průměr připojitelného kabelu s pláštěm	3,8 ... 8,2 mm
Délka odizolování (odstraněného pláště)	32 mm

Geometrické údaje

Šířka	15,6 mm / 0.614 palců
Výška	13,2 mm / 0.52 palců
Hloubka	44,8 mm / 1.764 palců

Údaje o materiálu	
Upozornění k údajům o materiálu	
Zde najdete informace o specifikaci materiálu	
Barva	Černá
Izolační materiál	Polyamid (PA 66)
Třída hořlavosti podle UL94	V0
Požární zatížení	0,134 MJ
Hmotnost	2,9 g

Požadavky na prostředí	
Teplota pro zpracování	-5 ... +40 °C
Trvalá provozní teplota	-35 ... +85 °C
Upozornění k trvalé provozní teplotě	Izolační části pro teploty ≤ 105 °C

Obchodní údaje	
Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	50 ks
Druh balení	Box
Země původu	DE
GTIN	4045454233310
Číslo celního tarifu	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Atesty/certifikáty	
General approvals	



Schválení	Standardní	Název certifikátu
cURus Underwriters Laboratories Inc.	UL 1977	E45171



Ke stažení			
Environmental Product Compliance			
Compliance Search			
Environmental Product Compliance 890-502			

Documentation			
Bid Text			
890-502	19.02.2019	xml 2.76 KB	
890-502	20.11.2014	doc 23.00 KB	

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 890-502	EPLAN Data Portal 890-502
	WSCAD Universe 890-502
	ZUKEN Portal 890-502