

MODEL: PN78000602
PN78000603



CZE | Před použitím tohoto výrobku si prosím přečtěte návod a postupujte podle bezpečnostních instrukcí. Instalaci svěřte kvalifikované osobě nebo firmě.

Před použitím výrobek zkontrolujte, je-li jakákoliv část poškozena, nepoužívejte jej. Před každou manipulací se ujistěte, že je elektrický přívod odpojený. V případě poruchy zařízení neopravujte ani nerozebírejte. Nedodržení jakékoliv instrukce uvedené v návodu může způsobit újmu na zdraví i majetku. Zajištěním optimálního chlazení se prodlužuje životnost zařízení. Při mechanickém poškození, neodborné manipulaci, porušeném čárovém kódu nebo plomby nemůže být uznána záruka.

ENG | Before using or installing this product, please read the instructions and follow safety rules. Installation should be provided by qualified person/company.



Before using, check the product and make sure it is not damaged, otherwise do not use it. Before any manipulation make sure that mains electrical supply is disconnected. In case of damage do not repair or disassemble the product. Infringement of any instruction mentioned in instruction manual can cause harm to health or property. Ensuring optimal conditions for heat dissipation prolongs the working life of the device. Warranty void if label, fragile label or unique barcode label is damaged or in case of improper handling.

Optional accessories:

REPEATER 666CC | REPEATER 666CV | WIRELESS CONTROLLER 666CV | WIRELESS CONTROLLER 666CC | WIFI 666

WIRELESS CONTROLLER 666 CV (Constant Voltage)



Input: 5÷24V=
Control input: Wireless
Output: PWM CV 5÷24V=
5Ax4CH

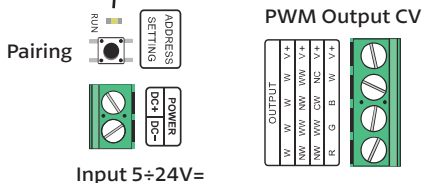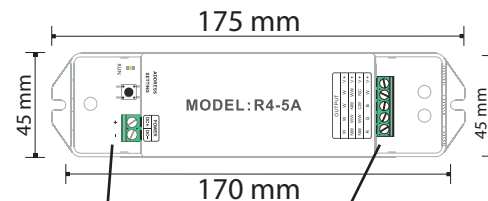

Input 5÷24V=

WIRELESS CONTROLLER 666 CC (Constant Current)

Input: 12÷48V=
Control input: Wireless
Output: PWM CC 350/700/1050mAx4CH
3÷46V=

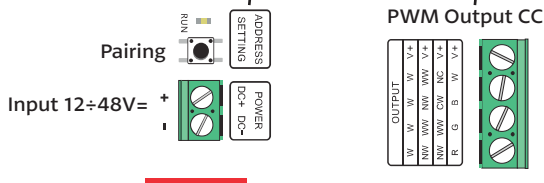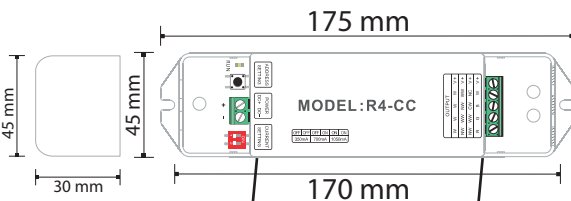

Input 12÷48V=



OFF	OFF	OFF	ON	ON	ON
350mA	700mA	1050mA			

OUTPUT						
W	W	W	W	V+		DIM
NW	WW	NW	WW	V+		
NW	WW	CW	NC	V+		CT/TAS
R	G	B	W	V+		RGB RGBW

MODEL: PN78000602
PN78000603

